

How to connect cable TV service to the Network Connection Center™

This document is intended to assist you in connecting cable television service through the Home Director Network Connection Center. For complete information, refer to the *Installation Manual* for the Network Connection Center on our Web site: www.homedirector.com


Connect cable service

1. The Network Connection Center installer should have run 2 black RG6 cables labeled "Cable TV" and "Cable TV Spare". Connect the "Cable TV" cable to the grounding block.
2. When additional cable service is required, connect the "Cable TV Spare" cable to the grounding block.

If the cables are not already connected inside the house, cable service will not work. You may have to connect cables inside the Network Connection Center.


When making connections inside the Network Connection Center, refer to the pictures to properly connect the cables.

**Basic Model
Video Amplifier**

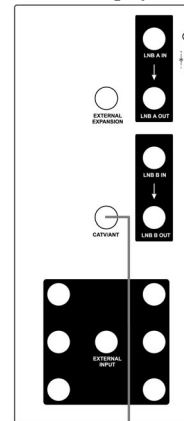


Connect "Cable TV" here

**Optional Basic Model
Video Amplifier**

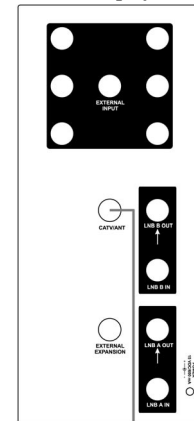

Connect "Cable TV Spare" here

**Starter Pack
Module**

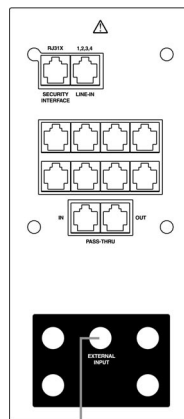


Connect "Cable TV" here

**Optional Starter Pack
Expansion Module**



Connect "Cable TV Spare" here

**Optional Personal Model
Video Amplifier**

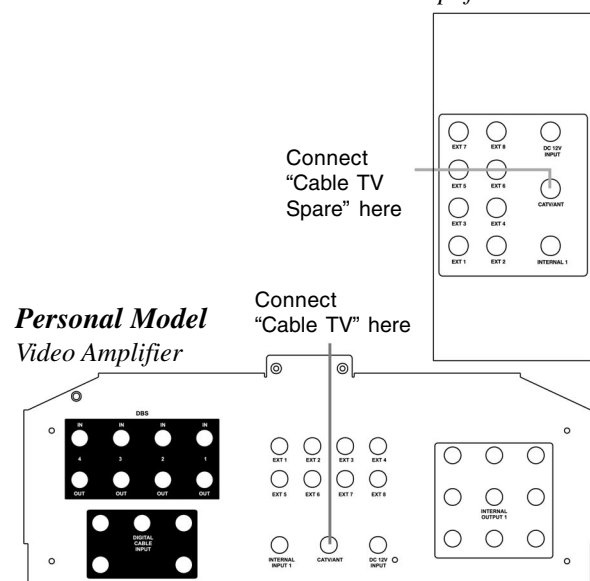

Connect "Cable TV Spare" here

Connect "Cable TV" here

**Personal Model
Video Amplifier**