


Important Information about 4x8 Telecom Modules

If the home where you are installing this 4x8 Telecom Module has a security system, follow these instructions to ensure that the security system properly communicates through the Telecom Module with the security monitoring company.

4x8 Base Telecom Module for the Network Connection Center

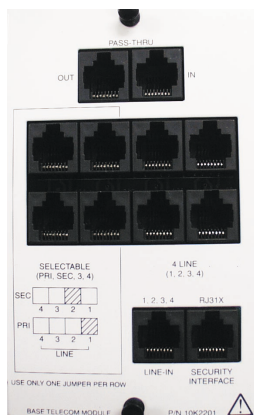

4x8 Base Telecom Module

If you are installing more than one 4x8 Base Telecom Module:

1. Select which module will be the primary telephone module (determined by the location of Line 1 from the NID).
2. If an RJ-31X shorting plug is installed on the primary module, remove it.
3. Connect the phone line from the security system into the RJ-31X port on the primary module.
4. Install an RJ-31X shorting plug on the other Telecom Modules.

*A Network Interface Device (NID) is an interface box provided by the telephone company. It is located on the outside of the home.

For detailed information on installing and configuring a 4x8 Telecom Module for either the HNCC or the NCC, refer to the *Installation Manual* for the Connection Centers.